


DF-140E

Reliable, Accurate O₂ Sensor in Nema 4x Enclosure

The DF-140E with the E-Sensor delivers superior oxygen analysis for harsh and hazardous areas. The DF-140E can be used in a Nema 4x enclosure for outdoor applications and with a Nema 7 remote sensor enclosure for explosive environments.

Improved Speed of Response (figure 3)

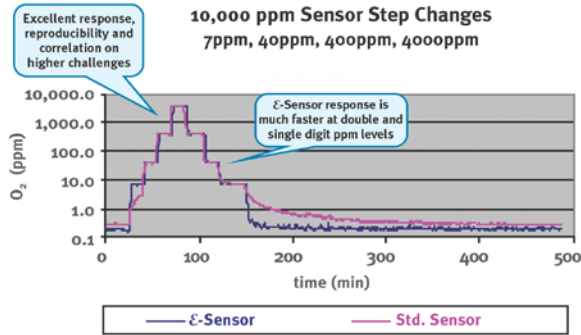

Long Term Reliability

- The E-Sensor never requires rebuilding or replacement

Durability

- Can be used in Class 1, Division 1 or 2

Low Maintenance

- Little or no recalibration for the E-Sensor

STAB-EL™ option

- Allows measurement in the presence of Acid Gases

For more information about the DF-140E, the 100E Series or the E-Sensor, visit www.delta-f.com.

DF-140E Specifications

Range

Ranges are available from 0-10 ppm to 0-25%

Sample Gas Compatibility

Standard Sensor – All inert and passive gases including N₂, H₂, CO, freons, hydrocarbons, etc.

Sensor With STAB-EL™ Option – Neutralizes trace contaminants including acids such as CO₂, H₂S, NO_x, SO_x, etc. (Consult Delta F for concentration limits)

Options

Enclosures for Class 1, Div. 1&2	Flow Alarm
STAB-EL™ Acid Gas Ssystem	Three Range
CE Certification	Isolated 4-20 mADC output
Oxygen Alarms	Remote Sensor Heater
Sample Pump	

Accuracy

Greater of ±3% of reading or 0.5% of measurement range

Response Time

Responds simultaneously to O₂ change.
Equilibrium time depends on specific conditions
Typically less than 10 seconds to read 90% of a step change

Sample Requirements

Gas phase, non-condensing, 0 to 150°F
Flow should be 1.0 to 3.0 SCFH at 0.2 to 1.0psig pressure

Misc.

19.7 cm W x 21.6 cm H x 25.4 cm D 7kg (7.75"Wx8.5"Hx10"D 15 lbs.)
Operate between 0° and 45° C ambient (32° and 120° F)
115 VAC or 220 VAC at 25 Watts

Configuration and Installation

Delta F provides comprehensive assistance for a broad variety of application problems including sample gases with acids, hydrocarbons, particles and other contaminants. Depending on the model, Delta F analyzers can be configured to provide a wide choice of outputs for data collection and process control systems. Most Delta F analyzers can be configured for remote operation and all can be ordered with classified area enclosures. Contact your Delta F rep for an Applications Data Sheet and pricing information.



Delta F Corporation
4 Constitution Way
Woburn, MA 01801-1087
USA

Tel: (781) 935-4600
Fax: (781) 938-0531

e-mail: marketing@delta-f.com
www.delta-f.com